

Features

IEC Standard	450V Voltage	32A Current	4kv Voltage Resistance	-40°C~ +105°C Ambient Temp	11-12mm Strip Length	2-5 Number of Poles
------------------------	------------------------	-----------------------	----------------------------------	--	--------------------------------	-------------------------------

Wire Diameter

 0.4-2.5mm²	 0.5-4mm²
↑ Stranded	↑ Solid Core

Range




Splicing Connector Blocks in Bottles

PART NUMBER	DESCRIPTION	QUANTITY
PCT-212B	2 Pole Terminal Block	100 pcs
PCT-213B	3 Pole Terminal Block	70 pcs
PCT-215B	5 Pole Terminal Block	50 pcs

Splicing Connector Blocks in Bags

PART NUMBER	DESCRIPTION	QUANTITY
PCT-212P6	2 Pole Terminal Block	6 pcs
PCT-213P6	3 Pole Terminal Block	6 pcs
PCT-215P6	5 Pole Terminal Block	6 pcs

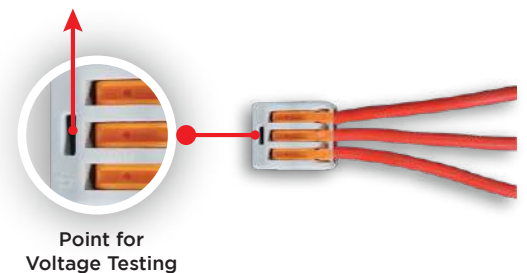

Connector Blocks | Splicing Range

CONTACT

South Africa

www.major-tech.com sales@major-tech.com

Australia

www.major-tech.com.au info@major-tech.com.au