



The PIR32 automatically turns on lights or any electrical device within the sensors rated load, when motion and body heat is detected. It has a 360° detection area and adjustable settings for time and Lux level, easily integrated into new or existing installations. With an IP20 rating, the sensor is intended for indoor installations. Installation must be done by a qualified electrician.




### Features


- <3 – 2000 LUX (Adjustable)
- 360° Detection Area
- 6m Detection Distance
- Automatically turns on lights when motion and body heat is detected
- Time-delay and ambient light adjustment
- Identify day and night automatically
- Rated Load
  - 1200W (Incandescent Lamps)
  - 600W (LED / CFL)
- IP20 Rating - Indoor Installations
- White Housing

Function	Range
Detection Area	360°
Detection Distance	6m Max. <24°C
Detection Motion Speed	0.6 to 1.5m/s
Ambient Light	<3 to 2000 Lux (Adjustable)
Installation Height	2.2m to 4m
Voltage	220 to 240V AC
Power Frequency	50/60Hz
Rated Load	1200W (Incandescent) 600W (LED / CFL)
Time Delay	10 sec to 15 min
IP Rating	IP20 (Indoor Installation)
Cut Out Size	Ø64mm
Standards	IEC 60669-1 / IEC 60669-2-1 AS/NZS 60669.1 / AS 60669.2.1

### Sensor Information

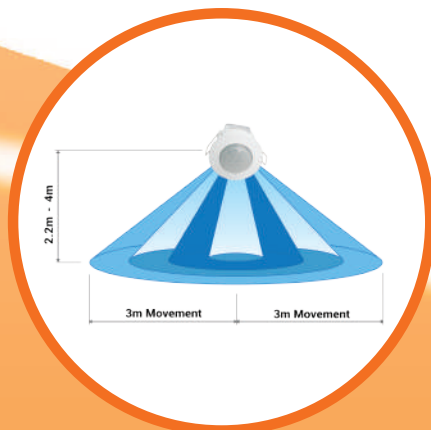

Ceiling Installation

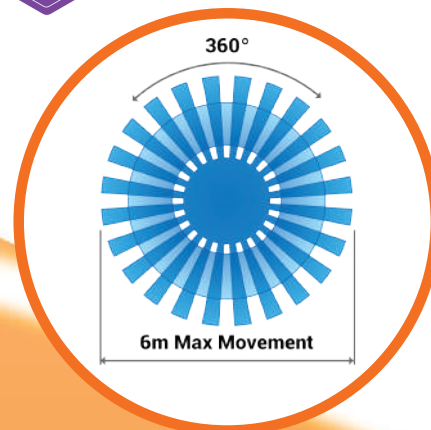

360° Detection Range

### PIR32 | 360° PIR Motion Sensor

Contact Us  
South Africa

[www.major-tech.com](http://www.major-tech.com) [sales@major-tech.com](mailto:sales@major-tech.com)

Australia

[www.major-tech.com.au](http://www.major-tech.com.au) [info@major-tech.com.au](mailto:info@major-tech.com.au)